



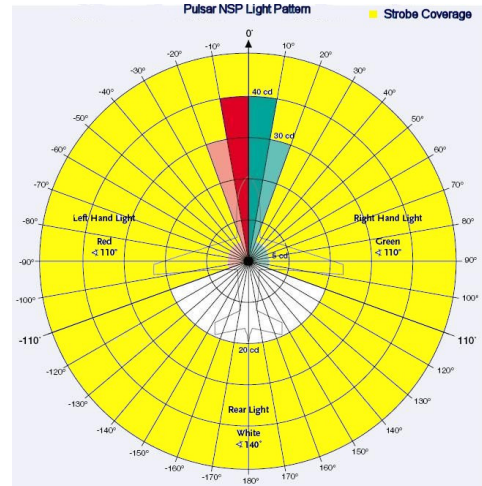

Product Datasheet

Pulsar NSP Nav/Position/Strobe Light

11-1080-C-L (red) 11-1080-C-R (green)

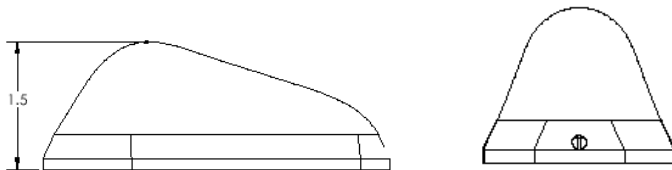

Voltage Range: 9-36VDC
 Position Light Current: 0.4A : 14V, 0.2A : 28V
 Strobe Peak Current: 2.25A : 14V, 1.12A : 28V
 for 0.33 seconds
 Power Consumption: 20 Watts Avg
 Strobe Power Supply: Built In
 Strobe Synchronization: Built In
 Thermal Protection: Built In
 Nav/Position Light: TSO C-30c Type I, Type II, Type III
 Strobe: TSO C-96a Class II
 LED Count: 24

Length: 4"
 Width: 1.85"
 Depth: 1.5"
 Weight: 4 Oz
 Heat Sink Material: Clear Anodized Aluminum
 Lens Material: Polycarbonate
 Screw Mount: 3x 6-32 Machine Screws
 Rated Life: 50,000 Hours
 Temperature Range: -55C to +70C

